




NovaBell
Ceramiche Gruppo Bellei
www.novabell.it

soft



gres porcellanato colorato in massa
through body porcelain
durchgefärbtes Feinsteinzeug
grès céram plein masse
gres porcelánico a todo espesor



soft



nero



nero



45 x 45 - 17 11/16" x 17 11/16"



SFT 909 NERO

515



45 x 45 - 17 11/16" x 17 11/16"



SFT 009 NERO ANTISLIP *

535



45 x 45 - 17 11/16" x 17 11/16"



SFT D903 CAMPITURA TEXTURE NERO

663



45 x 45 - 17 11/16" x 17 11/16"



SFT D90K CAMPITURA FIORI NERO

430





45 x 45 - 17 11/16" x 17 11/16"



SFT D92K DECORO TONDI NERO

430

soft

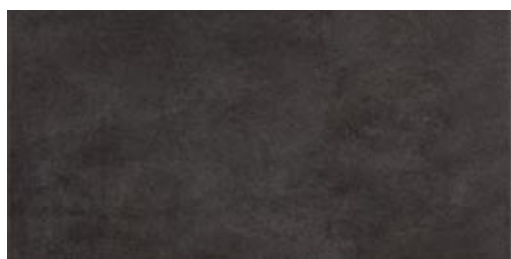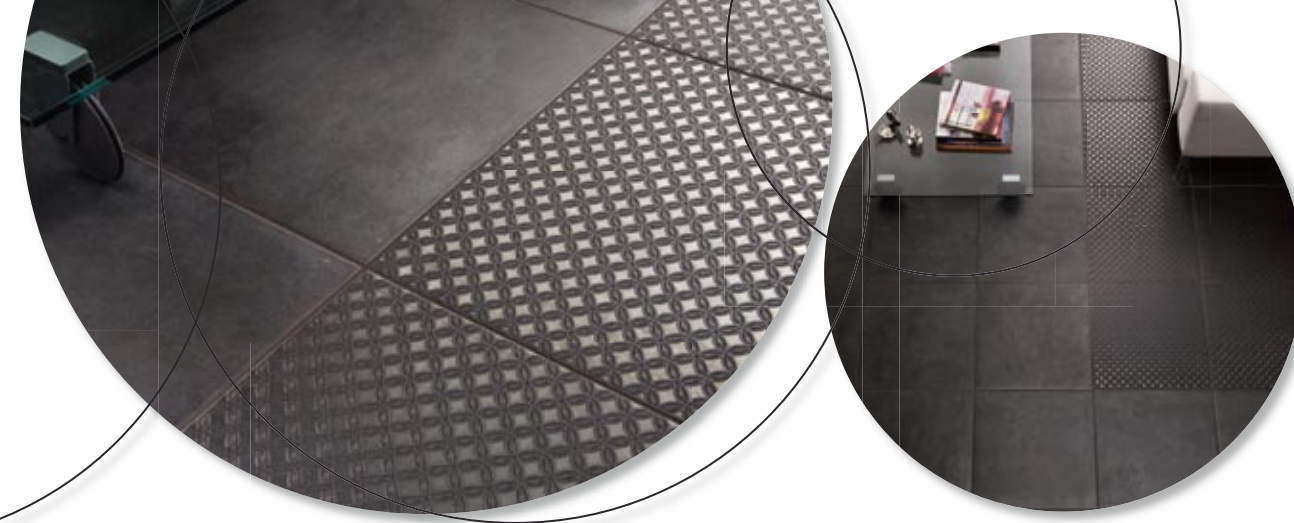


30 x 60 - 11 13/16" x 23 5/8"

SFT 099 NERO



515

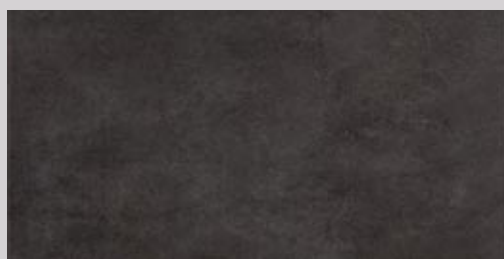


30 x 60 - 11 13/16" x 23 5/8"

SFT 090 NERO ANTISLIP *



535




30 x 30 - 11 13/16" x 11 13/16"

SFT 999 NERO ANTISLIP *



535

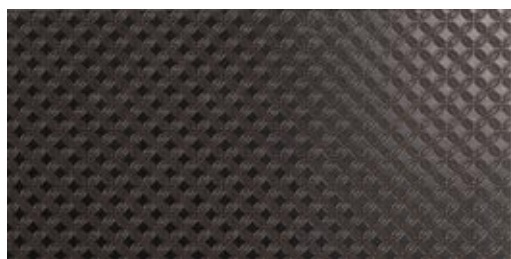

30 x 60 - 11 13/16" x 23 5/8"

SFT D093 CAMPITURA TEXTURE NERO



663



30 x 30 - 11 13/16" x 11 13/16"

SFT 997 MOSAICO NERO
(2,5x2,5)



674



30 x 30 - 11 13/16" x 11 13/16"

SFT 995 MOSAICO
BRILLANTI NERO
(5x5)



500




7 x 60 - 2 3/4" x 23 5/8"

SFT X97K LISTELLO RAMAGE NERO



300

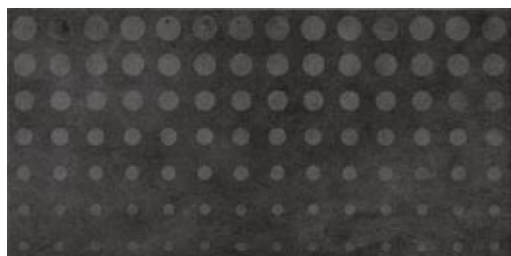


30 x 60 - 11 13/16" x 23 5/8"

SFT D95K DECORO TONDI NERO



430

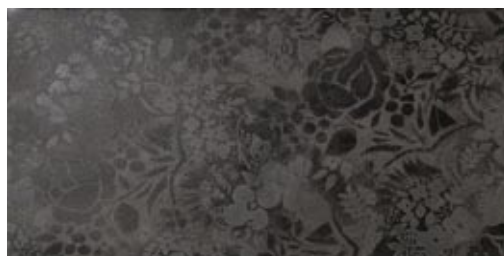

30 x 60 - 11 13/16" x 23 5/8"

SFT D97K CAMPITURA RAMAGE NERO



430



20 x 30 - 7 7/8" x 11 13/16"

SFT 993K FASCIA
MOSAICO NERO




220

* produzione speciale su richiesta - special production by request

antracite



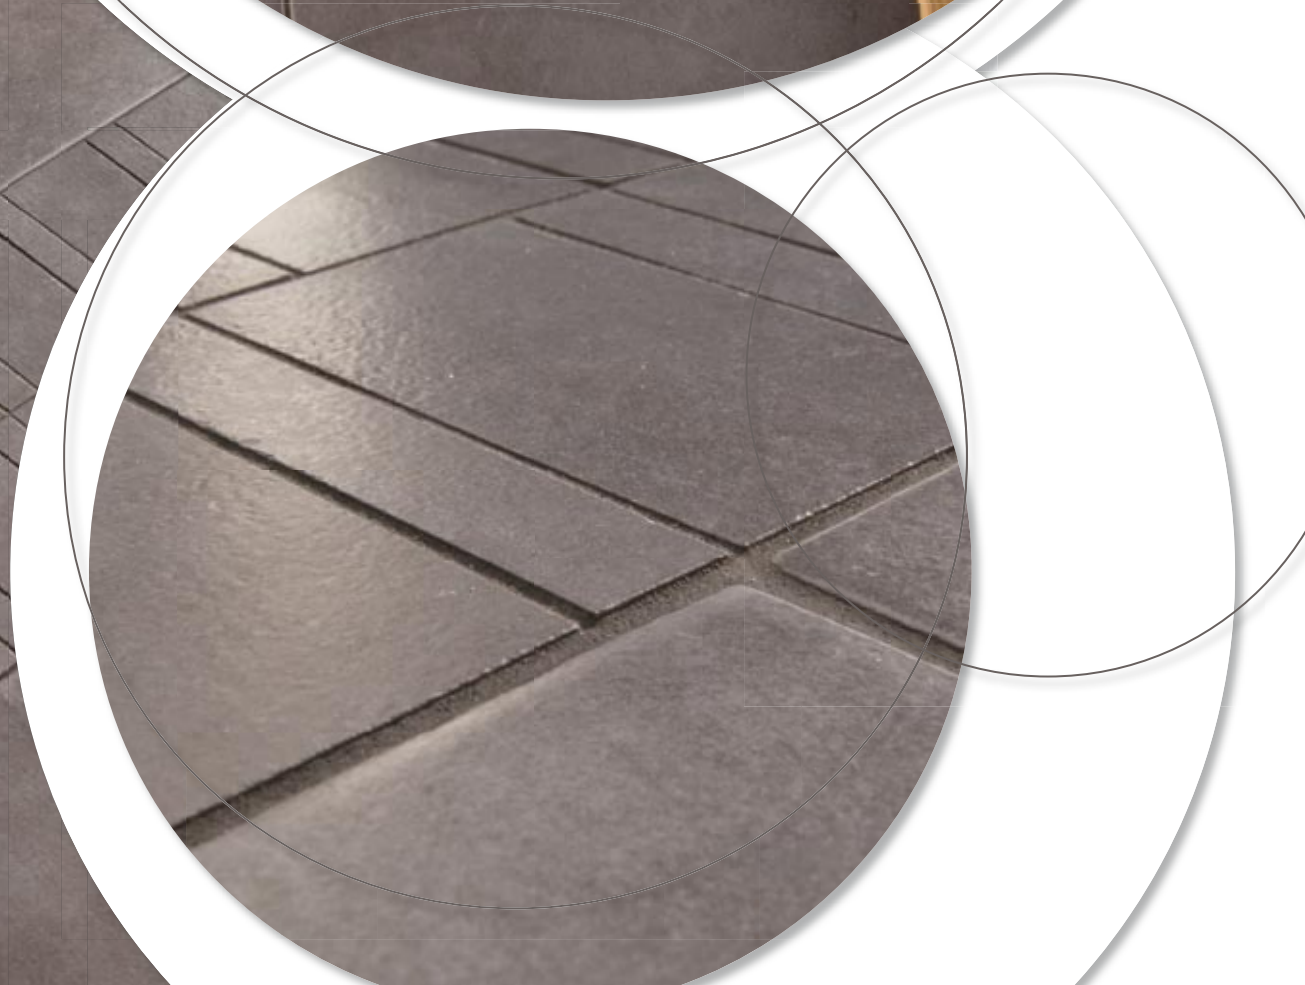

antracite



45 x 45 - 17 11/16" x 17 11/16"



SFT 202 ANTRACITE

515



45 x 45 - 17 11/16" x 17 11/16"



SFT 002 ANTRACITE ANTISLIP *

535



45 x 45 - 17 11/16" x 17 11/16"



**SFT D203 CAMPITURA TEXTURE
ANTRACITE**

663




45 x 45 - 17 11/16" x 17 11/16"



SFT D20K CAMPITURA FIORI ANTRACITE

430

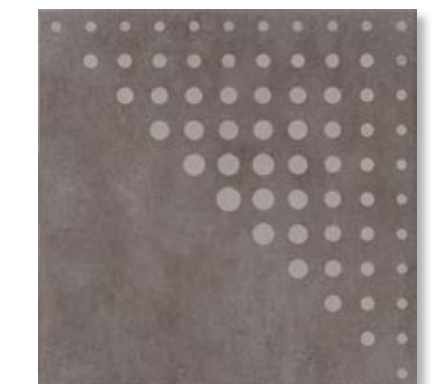


45 x 45 - 17 11/16" x 17 11/16"



SFT D22K DECORO TONDI ANTRACITE

430

soft

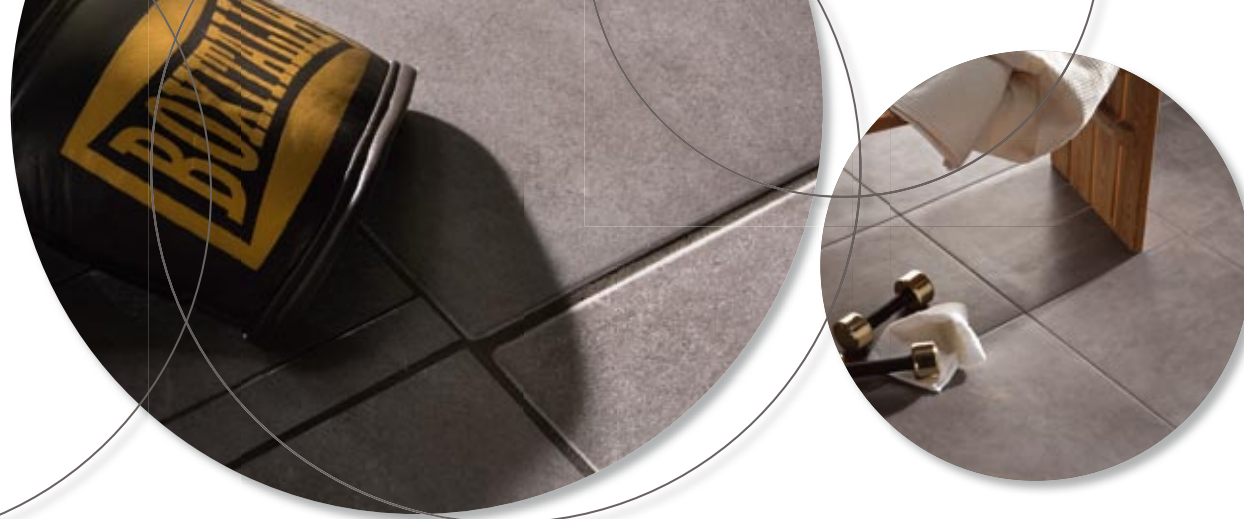


30 x 60 - 11 13/16" x 23 5/8"

SFT 022 ANTRACITE



515

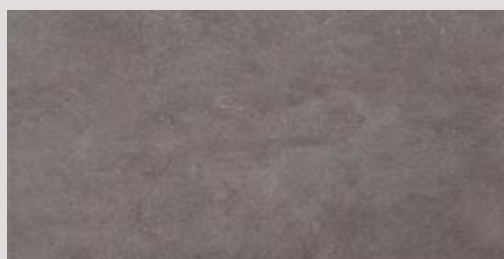


30 x 60 - 11 13/16" x 23 5/8"

SFT 020 ANTRACITE ANTISLIP*



535



30 x 30 - 11 13/16" x 11 13/16"

**SFT 222 ANTRACITE
ANTISLIP***



535



30 x 60 - 11 13/16" x 23 5/8"

SFT D023 CAMPITURA TEXTURE ANTRACITE



663



30 x 30 - 11 13/16" x 11 13/16"

**SFT 227 MOSAICO
ANTRACITE
(2,5x2,5)**



674



30 x 30 - 11 13/16" x 11 13/16"

**SFT 225 MOSAICO
BRILLANTI ANTRACITE
(5x5)**



500




7 x 60 - 2 3/4" x 23 5/8"

SFT X27K LISTELLO RAMAGE ANTRACITE



300

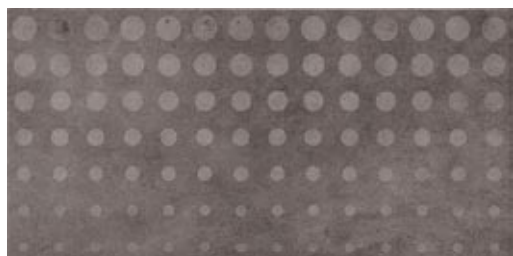

30 x 60 - 11 13/16" x 23 5/8"

SFT D25K DECORO TONDI ANTRACITE



430



30 x 60 - 11 13/16" x 23 5/8"

SFT D27K CAMPITURA RAMAGE ANTRACITE



430



20 x 30 - 7 7/8" x 11 13/16"

**SFT 223K FASCIA
MOSAICO ANTRACITE**



220

* produzione speciale su richiesta - special production by request

grigio chiaro





grigio
chiaro



45 x 45 - 17 11/16" x 17 11/16"



SFT 101 GRIGIO CHIARO

515



45 x 45 - 17 11/16" x 17 11/16"



SFT 001 GRIGIO CHIARO ANTISLIP *

535



45 x 45 - 17 11/16" x 17 11/16"



SFT D103 CAMPITURA TEXTURE
GRIGIO CHIARO

663



45 x 45 - 17 11/16" x 17 11/16"



SFT D10K CAMPITURA FIORI
GRIGIO CHIARO

430




45 x 45 - 17 11/16" x 17 11/16"



SFT D11K DECORO TONDI GRIGIO CHIARO

430

soft

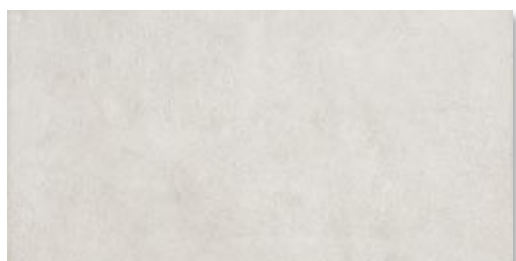


30 x 60 - 11 13/16" x 23 5/8"

SFT 011 GRIGIO CHIARO



615

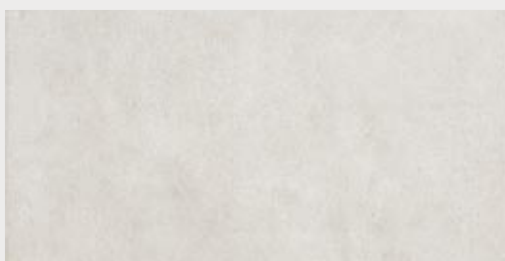


30 x 60 - 11 13/16" x 23 5/8"

SFT 010 GRIGIO CHIARO ANTISLIP *



535




30 x 30 - 11 13/16" x 11 13/16"

SFT 111 GRIGIO CHIARO
ANTISLIP *



535

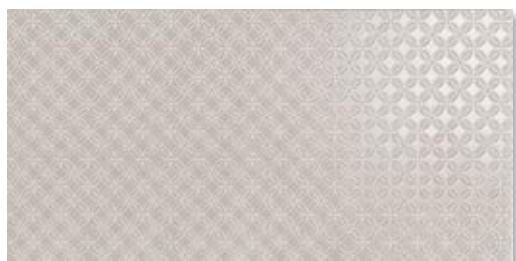

30 x 60 - 11 13/16" x 23 5/8"

SFT D013 CAMPITURA TEXTURE GRIGIO CHIARO



663



30 x 30 - 11 13/16" x 11 13/16"

SFT 117 MOSAICO
GRIGIO CHIARO
(2,5x2,5)



674



30 x 30 - 11 13/16" x 11 13/16"

SFT 115 MOSAICO
BRILLANTI GRIGIO CHIARO
(5x5)



500



7 x 60 - 2 3/4" x 23 5/8"

SFT X17K LISTELLO RAMAGE GRIGIO CHIARO



300



30 x 60 - 11 13/16" x 23 5/8"

SFT D15K DECORO TONDI GRIGIO CHIARO



430



30 x 60 - 11 13/16" x 23 5/8"

SFT D17K CAMPITURA RAMAGE GRIGIO CHIARO



430




20 x 30 - 7 7/8" x 11 13/16"

SFT 113K FASCIA MOSAICO
GRIGIO CHIARO



220

* produzione speciale su richiesta - special production by request

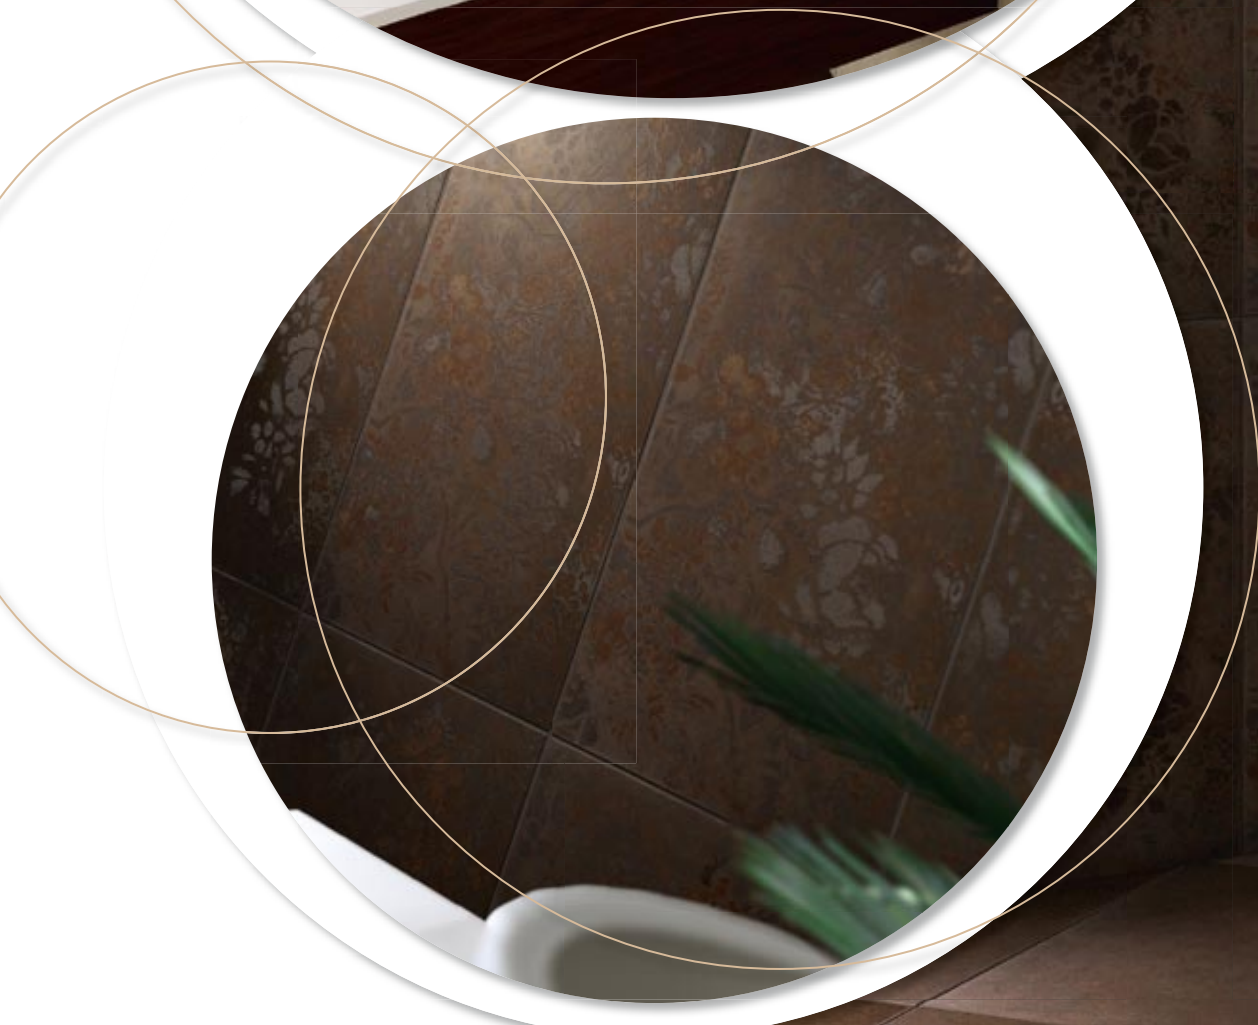



beige • caffè

beige




45 x 45 - 17 11/16" x 17 11/16"

SFT 404 BEIGE



515

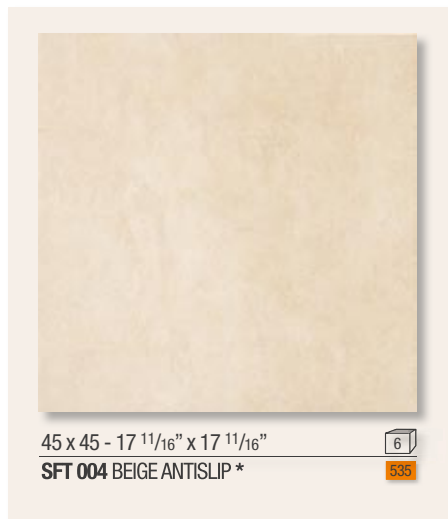

45 x 45 - 17 11/16" x 17 11/16"

SFT 004 BEIGE ANTISLIP *



535



45 x 45 - 17 11/16" x 17 11/16"

SFT D403 CAMPITURA TEXTURE BEIGE



663



45 x 45 - 17 11/16" x 17 11/16"

SFT D40K CAMPITURA FIORI BEIGE



430




45 x 45 - 17 11/16" x 17 11/16"

SFT D44K DECORO TONDI BEIGE



430

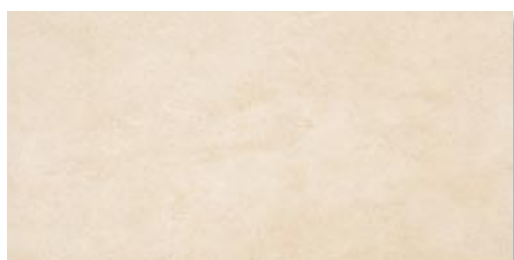


30 x 60 - 11 13/16" x 23 5/8"

SFT 044 BEIGE



615

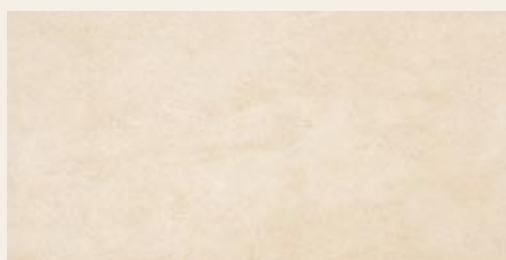


30 x 60 - 11 13/16" x 23 5/8"

SFT 040 BEIGE ANTISLIP *



535



30 x 30 - 11 13/16" x 11 13/16"

SFT 444 BEIGE ANTISLIP *



535



30 x 60 - 11 13/16" x 23 5/8"

SFT D043 CAMPITURA TEXTURE BEIGE



663



30 x 30 - 11 13/16" x 11 13/16"

SFT 447 MOSAICO BEIGE
(2,5x2,5)



674



30 x 30 - 11 13/16" x 11 13/16"

SFT 445 MOSAICO
BRILLANTI BEIGE
(5x5)



500



7 x 60 - 2 3/4" x 23 5/8"

SFT X47K LISTELLO RAMAGE BEIGE



300



30 x 60 - 11 13/16" x 23 5/8"

SFT D45K DECORO TONDI BEIGE



430



30 x 60 - 11 13/16" x 23 5/8"

SFT D47K CAMPITURA RAMAGE BEIGE



430



20 x 30 - 7 7/8" x 11 13/16"

SFT 443K FASCIA
MOSAICO BEIGE



220

caffè




45 x 45 - 17 11/16" x 17 11/16"

SFT 606 CAFFÈ

6

515

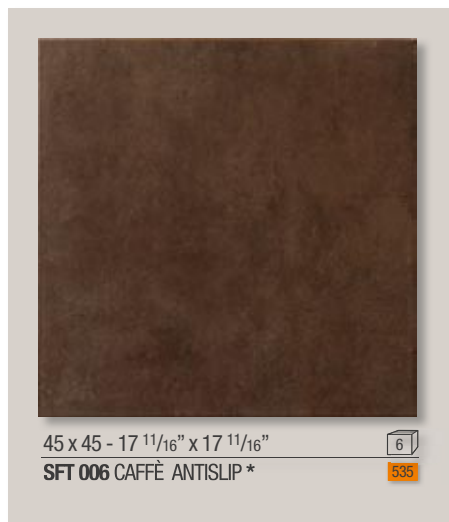


45 x 45 - 17 11/16" x 17 11/16"

SFT 006 CAFFÈ ANTISLIP *

6

535

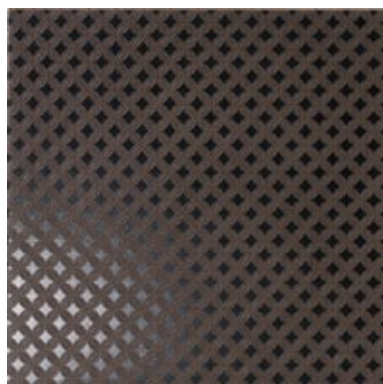

45 x 45 - 17 11/16" x 17 11/16"

SFT D603 CAMPITURA TEXTURE CAFFÈ

4

663



45 x 45 - 17 11/16" x 17 11/16"

SFT D60K CAMPITURA FIORI CAFFÈ

4

430




45 x 45 - 17 11/16" x 17 11/16"

SFT D66K DECORO TONDI CAFFÈ

4

430

soft

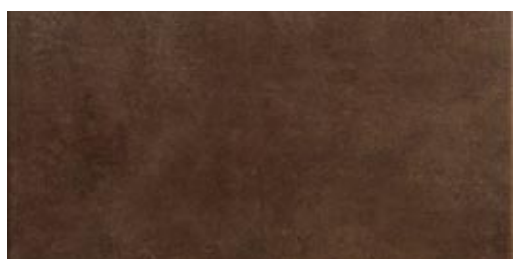


30 x 60 - 11 13/16" x 23 5/8"

SFT 066 CAFFÈ



615

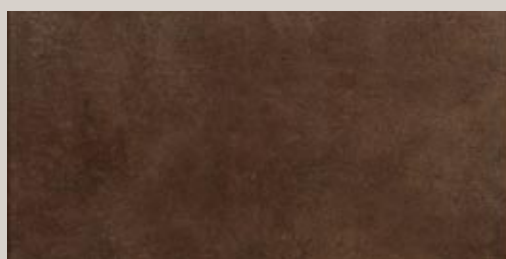


30 x 60 - 11 13/16" x 23 5/8"

SFT 060 CAFFÈ ANTISLIP *



535



30 x 30 - 11 13/16" x 11 13/16"

SFT 666 CAFFÈ ANTISLIP *



535



30 x 60 - 11 13/16" x 23 5/8"

SFT D063 CAMPITURA TEXTURE CAFFÈ



663



30 x 30 - 11 13/16" x 11 13/16"

SFT 667 MOSAICO CAFFÈ
(2,5x2,5)



674



30 x 30 - 11 13/16" x 11 13/16"

**SFT 665 MOSAICO
BRILLANTI CAFFÈ**
(5x5)



500



7 x 60 - 2 3/4" x 23 5/8"

SFT X67K LISTELLO RAMAGE CAFFÈ



300



30 x 60 - 11 13/16" x 23 5/8"

SFT D65K DECORO TONDI CAFFÈ



430



30 x 60 - 11 13/16" x 23 5/8"

SFT D67K CAMPITURA RAMAGE CAFFÈ



430



20 x 30 - 7 7/8" x 11 13/16"

**SFT 663K FASCIA
MOSAICO CAFFÈ**



220

* produzione speciale su richiesta - special production by request

CARATTERISTICHE TECNICHE TECHNICAL PERFORMANCE

09315
PORCELAIN
TILE



Resistenza all'usura
Abrasion resistance
PEI IV
PEI V (only for Antislip)



DIN 51130 R9



ANTISLIP
ASTM C 1028
DRY 0.70 WET 0.65
DIN 51130 R10

IMBALLI PACKAGES

	 SCATOLA/BOX			 PALLET		
	pz.	m ²	Kg	sc.	m ²	Kg
45x45 naturale/antislip	6	1.24	23.1	34	42.16	785
30x60 naturale/antislip	7	1.28	29.62	40	51.2	1185
30x30 antislip	12	1.094	24	48	52.5	1152

NOTE NOTES

Per un miglior effetto estetico, consigliamo la stuccatura con sigillanti di qualità riconosciuta e nei toni corrispondenti alla piastrella indicata

SOFT Nero	colore stucco COD 120 Mapei, o similare
SOFT Antracite	colore stucco COD 114 Mapei, o similare
SOFT Grigio	colore stucco COD 111 Mapei, o similare
SOFT Beige	colore stucco COD 130 Mapei, o similare
SOFT Caffè	colore stucco COD 144 Mapei, o similare

soft

TECHNICAL CHARACTERISTICS		TEST METHOD	ANSI 137.1 Values required for glazed impervious porcelain tiles	
Water absorption (E)		ASTM C373	E ≤ 0,5%	Conforms
Breaking strength (S)		ASTM C648	≥ 250 Lbs	Conforms
Resistance to surface abrasion (PEI)		ASTM C1027	Not required	PEI V
Linear thermal expansion coefficient		ASTM C372	Not required	$\alpha \leq 8 \times 10^{-6} \text{ }^{\circ}\text{C}^{-1}$ $\alpha \leq 4,4 \times 10^{-6} \text{ }^{\circ}\text{F}^{-1}$
Frost proof		ASTM C1026	No alterations	Resistant
Resistance to chemicals		ASTM C650	Not required	Resistant
Stain resistance		CTI 81-7 - Annexe D	Not required	Resistant
Slip resistance (coefficient of static friction Fc)		ASTM C1028	Fc < 0.50 Questionable 0,50 ≤ Fc < 0.60 Conditionally slip resistant Fc ≤ 0.60 Slip resistant	DRY Neolite ≥ 0.75 WET Neolite ≥ 0.65 Only for Antislip version

All Novabell products meet or exceed all standards in ANSI A 137.1.
Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.

 Frost-resistant  ADA Compliant

Caratteristiche o proprietà con le deviazioni ammesse Characteristics or properties with allowed deviations Daten oder Eigenschaften mit zulässigen Abweichungen Caractéristiques ou propriétés avec les tolérances admises Característica o propiedades con las desviaciones permitidas Характеристики или свойства с допустимыми отклонениями		METODO DI PROVA ISO ISO TEST METHOD PRÜFMETHODE NACH ISO METHODE D'ESSAI ISO MÉTODO DE PRUEBA ISO ИСПЫТАТЕЛЬНЫЙ МЕТОД ISO	REQUISITI PRESCRITTI DALLA NORMA EN 14411-G REQUIREMENTS OF EN 1441-G STANDARD ANFORDERUNGEN GEMÄSS DER NORM EN 14411-G CONDITIONS REQUISES PAR LA NORME EN 14411-G REQUISITOS ESTABLECIDOS POR LA NORMA UNE EN ISO14411-G ТРЕБОВАНИЯ, ПРЕДУСМОТРЕННЫЕ НОРМОЙ EN 14411-G	09315 PORCELAIN TILE soft
Caratteristiche dimensionali Size characteristics Maßeigenschaften Caractéristiques dimensionnelles Características dimensionales Размерные характеристики		ISO 10545-2	Lunghezza e larghezza - Length and width - Länge und Breite Longueur et largeur - Largura y anchura - Длина и ширина ± 0,6% Spessore - Thickness - Stärke - Epaisseur - Espesor - Толщина ± 5% Ortogonalità - Wedging - Rechtwinkligkeit Orthogonalité - Ortogonalidad - Прямолинейность ± 0,6% Planarità - Flatness - Ebenfächigkeit - Planéité - llanura - Плоскостность ± 0,5%	± 0,3% 190cm² < Sup 5410cm² ± 0,5% ± 3% ± 2% Rettificato/Ground to size ± 0,15% ± 0,3%
Assorbimento d'acqua (E) Water absorption (E) Wasseraufnahme (E) Absorption d'eau (E) Absorción del agua (E) Водопоглощение (E)		ISO 10545-3	E ≤ 0,5%	E 0,2%
Resistenza alla flessione Breaking strength Biegefestigkeit Résistance à la flexion Resistencia a la flexión Сопротивление на изгиб		ISO 10545-4	≥ 35 N/mm² min. ≥ 355 kg/cm²	≥ 50 N/mm² ≥ 510 kg/cm²
Resistenza all'urto - Coefficiente di restituzione Impact resistance - Coefficient of restitution Schlagfestigkeit - Rückprallkoeffizient Résistance au choc - Coefficient de restitution Resistencia a los golpes - Coeficiente de restitución Ударопрочность - Коэффициент отдачи		ISO 10545-5	M. di P. D.	> 0.80
Coefficiente di dilatazione termica lineare Linear thermal expansion coefficient Wärmeausdehnungskoeffizient Coefficient de dilatation thermique linéaire Coeficiente de expansión térmica linear Коэффициент линейного теплового расширения		ISO 10545-8	M. di P. D.	α ≤ 7 x 10⁻⁶°C⁻¹
Resistenza agli sbalzi termici Resistance to thermal shocks Temperaturwechselbeständigkeit Résistance aux variations thermiques Resistencia a las variaciones térmicas Стойкость к тепловым перепадам		ISO 10545-9	M. di P. D.	Resistenti Resistant Widerstandsfähig Résistant Resistentes Стойкие
Dilatazione all'umidità: in mm/m Moisture expansion: in mm/m Feuchtigkeitsdehnung: in mm/m Dilatation à l'humidité: en mm/m Dilatación debido a humedad: en mm/m Разбухание во влажных условиях: мм/м		ISO 10545-10	M. di P. D.	≤ 0,06%
Resistenza al cavillo (piastrelle smaltate) Crazing resistance (glazed tiles) Widerstandsfähigkeit gegen Glasurrisse (glasierte Fliesen) Résistance au tressailage (carreaux émaillés) Resistencia al cuarteo (azulejos esmaltados) Стойкость к кракелюру (глазурованная плитка)		ISO 10545-11	Richiesta Request Anforderung Demande Solicitud Требуемое	Resistenti Resistant Widerstandsfähig Résistant Resistentes Стойкие
Resistenza al gelo Frost proof Frostbeständigkeit Résistance au gel Resistencia al hielo Морозостойкость		ISO 10545-12	Richiesta Request Anforderung Demande Solicitud Требуемое	Resistenti Resistant Widerstandsfähig Résistant Resistentes Стойкие
Resistenza ai prodotti chimici Resistance to chemicals Chemikalienbeständigkeit Résistance aux produits chimiques Resistencia a los productos químicos Стойкость к воздействию химикатов		ISO 10545-13	Piastrelle smaltate - Glazed tiles - Glasierte Fliesen Carreaux émaillés - Azulejos esmaltados - Глазурованная плитка S.C.I.F. Piastrelle non smaltate - Unglazed tiles - Unglasierte Fliesen Carreaux non émaillés - Azulejos no esmaltados - Нерглазурованная плитка M. di P. D.	Resistenti Resistant Widerstandsfähig Résistant Resistentes Стойкие
Resistenza ai prodotti chimici di uso domestico Resistance to household chemicals Beständigkeit gegenüber Haushaltschemikalien Résistance aux produits chimiques ménagers Resistencia a los productos químicos de uso doméstico Стойкость к воздействию бытовых химикатов		ISO 10545-13	Piastrelle smaltate - Glazed tiles - Glasierte Fliesen Carreaux émaillés - Azulejos esmaltados - Глазурованная плитка ≥ GB Piastrelle non smaltate - Unglazed tiles - Unglasierte Fliesen Carreaux non émaillés - Azulejos no esmaltados - Нерглазурованная плитка ≥ UB	UA Resistenti Resistant Widerstandsfähig Résistant Resistentes Стойкие
Resistenza alle macchie Stain resistance Beständigkeit gegen Fleckenbildner Résistance aux taches Resistencia a las manchas Стойкость к образованию пятен		ISO 10545-14	Piastrelle smaltate - Glazed tiles - Glasierte Fliesen Carreaux émaillés - Azulejos esmaltados - Глазурованная плитка Classe ≥ 3 Piastrelle non smaltate - Unglazed tiles - Unglasierte Fliesen Carreaux non émaillés - Azulejos no esmaltados - Нерглазурованная плитка M. di P. D.	≥ 4 ≥ 3
Piccole differenze di colore - Tolleranza rispetto a campione di riferimento Small colour differences - Tolerance in relation to benchmark sample Geringfügige Farbabweichungen - Toleranz in Bezug auf das Referenzmuster Petites différences de couleur - Tolerance par rapport à l'échantillon de référence Pequeñas diferencias de color - Tolerancia respecto de muestras de referencia Небольшие цветовые отклонения - Допуск относительно эталонного образца		ISO 10545-16	M. di P. D.	≥ 90
Resistenza allo scivolamento Slip resistance Rutschemmende Eigenschaft Résistance au glissement Resistencia al deslizamiento Сопротивление скольжению		DIN 51130 ASTM C1028		Indicato sul catalogo Indicated in the catalogue Im Prospekt angegeben Indiqué sur le catalogue Indicado en el catalogo Указывается в каталоге
Legenda/Legend/Legende/Légende/Leyenda/Условные обозначения: M. di P.D. = Metodo di prova disponibile/Test method available/Verfügbare Prüfmethode/Méthode d'essai disponible/Método de prueba disponible/Имеющийся испытательный метод S.C.I.F. = Secondo la classificazione indicata dal fabbricante/According to manufacturer's classification/Gemäß der vom Hersteller angegebenen Klassifizierung Selon la classification indiquée par le fabricant/Según la clasificación indicada por el fabricante/Согласно указанной производителем классификации				



www.novabell.it

NOVABELL S.p.A. CERAMICHE ITALIANE
42014 ROTEGLIA (RE) Italy - Via Molino, 1
Tel. +39 0536 861111 - Fax +39 0536 851205
info@novabell.it - export@novabell.it - italia@novabell.it



COD. CATSFT

project